


电气特性:

1. 100%开路、短路、断路测试。
2. 绝缘阻抗: 10M Ohm Min
3. 导通阻抗: 2 Ohm MAX
4. 耐压: DC 300V, 0.01/Sec





11	标签	上光膜贴纸, 白底黑字, 印字内容: "P1&P2"	2	PCS
10	螺杆	螺杆, φ2.3x37mm	4	PCS
9	连接器	DB9公头, 插头镀金, 蓝色胶芯	2	PCS
8	连接器	USB A/M, 插头镀金, 白色胶芯	1	PCS
7	胶料	本色低密度PE	A/R	G
6	胶料	45P PVC, 黑色	A/R	G
5	外壳	一拖四 上下壳 黑色ABS	2	PCS
4	PCB	PCB板, 材质FR4, 一拖四 (FE1.1 USB2.0 HUB)	1	PCS
3	PCB	PCB板, 材质FR4, PIN:G/F, W13.5xL27.5xT1.2mm, FT232RL+ZT213CHIP	1	PCS
2	线材	(28AWGx1PxAL+24AWGx2C)xAL+B; OD:4.0mm, 黑色PVC外被	A/R	mm
1	线材	(28AWGx1PxAL+24AWGx2C)xAL+B; OD:5.0mm, 黑色PVC外被	A/R	mm
NO.	PART NAME	SPEC DESCRIPTION	QT'Y	UNIT


A	INITIAL RELEASE		25/12/18	
REV	DESCRIPTION OF CHANGE		DATE	
TOLERANCE			<b>OIKWAN® 东莞市蔼群实业有限公司</b> DONGGUAN AIQUN INDUSTRIAL CO.,LTD	
INCHES				
MM				
.X	.015	.30	SCALE	NONE
.XX	.010	.10	UNIT	MM
.XXX	.005	.05	SHEET	1/2
DRAWN BY			WYS	
CHECK BY			DATE	
APPD BY			25/12/18	
CUSTOMER P/N:			DWG NO:	
P/N: 1.ADB160050001			TITLE: USB-2*DB9公 镀金	

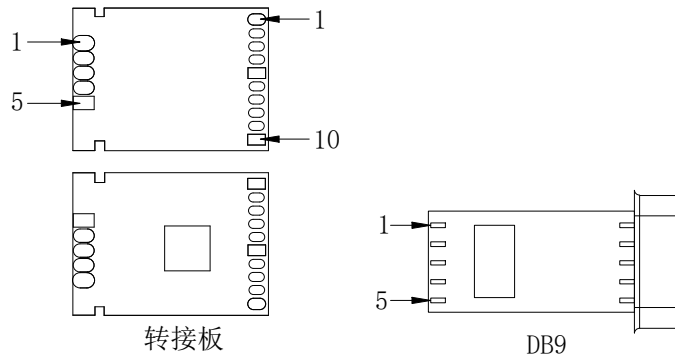

转接板

DB9

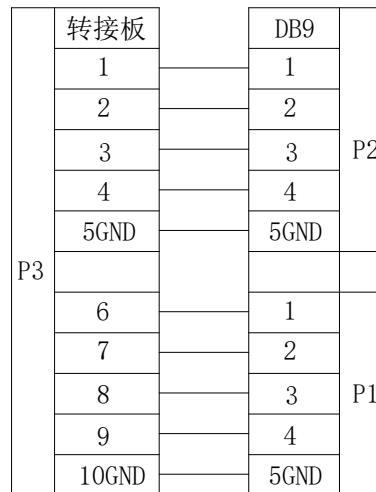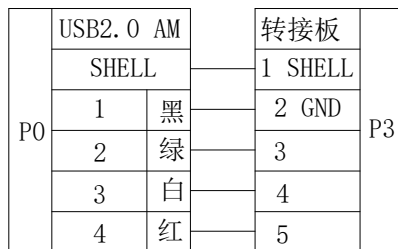

A	INITIAL RELEASE				25/12/18		
REV	DESCRIPTION OF CHANGE				DATE		
TOLERANCE			<b>DIKWAN® 东莞市蔼群实业有限公司</b> DONGGUAN AIQUN INDUSTRIAL CO.,LTD				
	INCHES	MM					
. X	. 015	. 30					
. XX	. 010	. 10					
. XXX	. 005	. 05	SCALE	NONE		REV	A0
DRAWN BY	WSY		UNIT	MM			
CHECK BY			SHEET	2/2	CUSTOMER:		
APPD BY			DATE	25/12/18	DWG NO:		
TITLE: USB-2*DB9公 镀金							
CUSTOMER P/N:			P/N: 1. ADB160050001				