


受控文件②
 2026-03-02
 DIKWAN

电气特性:
 1. 100%开路、短路、断路测试。
 2. 绝缘阻抗: 10M Ohm Min
 3. 导通阻抗: 2 Ohm MAX
 4. 耐压: DC 300V, 0.01/Sec



11	标签	上光膜贴纸, 白底黑字, 印字内容: "P1&P2&P3&P4"	4	PCS
10	螺杆	螺杆, $\phi 2.3 \times 37\text{mm}$	8	PCS
9	连接器	DB9公头, 插头镀金, 蓝色胶芯	4	PCS
8	连接器	USB C/M, G/F	1	PCS
7	胶料	本色低密度PE	A/R	G
6	胶料	45P PVC, 黑色	A/R	G
5	外壳	一拖四 上下壳 黑色ABS	2	PCS
4	PCB	PCB板, 材质FR4, 一拖四 (FE1.1 USB2.0 HUB)	1	PCS
3	PCB	PCB板, 材质FR4, PIN:G/F, W13.5xL27.5xT1.2mm, FT232RL+ZT213CHIP	1	PCS
2	线材	(28AWGx1PxAL+24AWGx2C)xAL+B; OD:4.0mm, 黑色PVC外被	A/R	mm
1	线材	(28AWGx1PxAL+24AWGx2C)xAL+B; OD:5.0mm, 黑色PVC外被	A/R	mm
NO.	PART NAME	SPEC DESCRIPTION	QT'Y	UNIT

A	INITIAL RELEASE	26/01/05
REV	DESCRIPTION OF CHANGE	DATE
TOLERANCE		DIKWAN® 东莞市谦群实业有限公司 DONGGUAN AIQUN INDUSTRIAL CO.,LTD
.X	.015 .30	
.XX	.010 .10	
.XXX	.005 .05	
DRAWN BY	WSY	SCALE NONE
CHECK BY		UNIT MM
APPD BY		SHEET 1/2
CUSTOMER P/N:		DATE 26/01/05
P/N: 1.ADB110040001		CUSTOMER: DWG NO:
		TITLE: TYPE C-4*DB9公 镀金

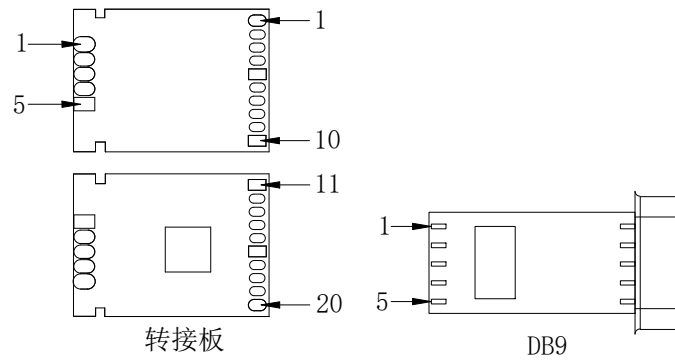

转接板

DB9

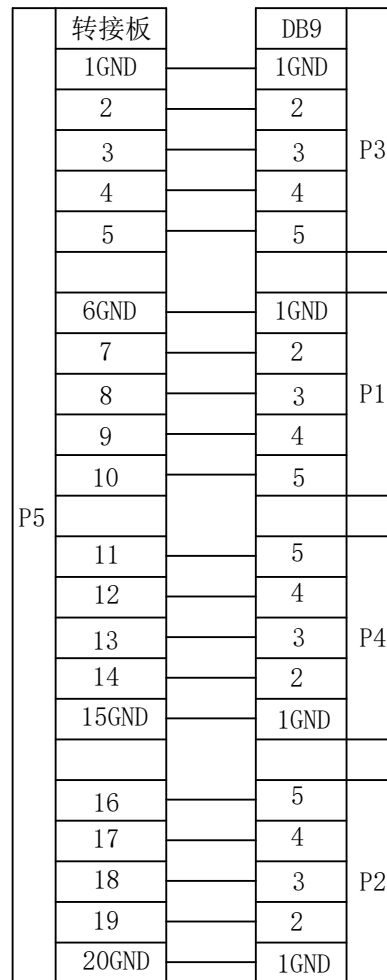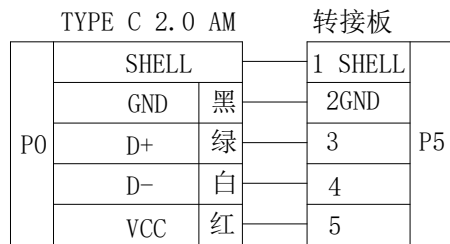

A	INITIAL RELEASE				26/01/05			
REV	DESCRIPTION OF CHANGE				DATE			
TOLERANCE			DIKWAN® 东莞市蔼群实业有限公司 DONGGUAN AIQUN INDUSTRIAL CO.,LTD					
		INCHES				MM		
. X	. 015	. 30						
. XX	. 010	. 10						
. XXX	. 005	. 05	SCALE	NONE				
DRAWN BY	WSY		UNIT	MM		REV		
CHECK BY			SHEET	2/2	CUSTOMER:			
APPD BY			DATE	26/01/05	DWG NO:			
CUSTOMER P/N:			TITLE: TYPE C-4*DB9公 镀金					
			P/N: 1. ADB110040001					