


受控文件②
2026-03-02
DIKWAN

电气特性:

1. 100%开路、短路、断路测试。
2. 绝缘阻抗: 10M Ohm Min
3. 导通阻抗: 2 Ohm MAX
4. 耐压: DC 300V, 0.01/Sec


11	标签	上光膜贴纸, 白底黑字, 印字内容: "P1&P2&P3&P4"	4	PCS
10	螺杆	螺杆, $\phi 2.3 \times 37\text{mm}$	8	PCS
9	连接器	DB9公头, 插头镀金, 蓝色胶芯	4	PCS
8	连接器	USB A/M, 插头镀金, 白色胶芯	1	PCS
7	胶料	本色低密度PE	A/R	G
6	胶料	45P PVC, 黑色	A/R	G
5	外壳	一拖四 上下壳 黑色ABS	2	PCS
4	PCB	PCB板, 材质FR4, 一拖四 (FE1.1 USB2.0 HUB)	1	PCS
3	PCB	PCB板, 材质FR4, PIN:G/F, W13.5xL27.5xT1.2mm, FT232RL+ZT213CHIP	1	PCS
2	线材	(28AWGx1PxAL+24AWGx2C)xAL+B; OD:4.0mm, 黑色PVC外被	A/R	mm
1	线材	(28AWGx1PxAL+24AWGx2C)xAL+B; OD:5.0mm, 黑色PVC外被	A/R	mm
NO.	PART NAME	SPEC DESCRIPTION	QT'Y	UNIT

A	INITIAL RELEASE		25/12/18
REV	DESCRIPTION OF CHANGE		DATE
TOLERANCE			DIKWAN® 东莞市谿群实业有限公司 DONGGUAN AIQUN INDUSTRIAL CO.,LTD
INCHES			
MM			
.X	.015	.30	
.XX	.010	.10	
.XXX	.005	.05	
DRAWN BY	WSY		SCALE NONE
CHECK BY			UNIT MM
APPD BY			SHEET 1/1
CUSTOMER P/N:			DATE 25/12/18
P/N: 1.ADB160040001			CUSTOMER:
			REV A0
			DWG NO:
			TITLE: USB-4*DB9公 镀金

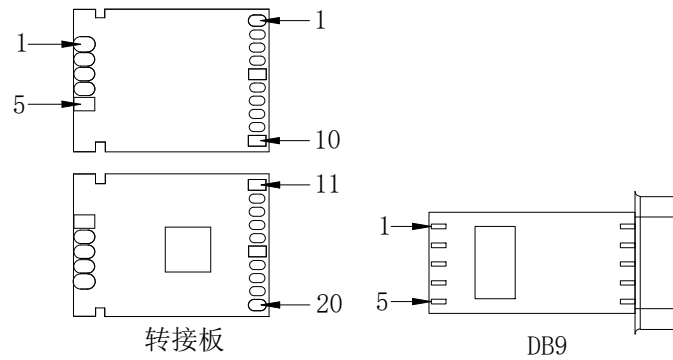

转接板

DB9

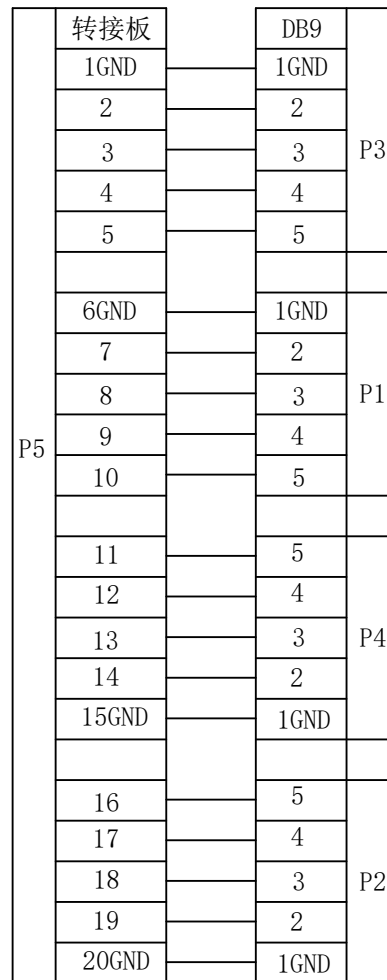

A	INITIAL RELEASE		25/12/18				
REV	DESCRIPTION OF CHANGE		DATE				
TOLERANCE			DIKWAN® 东莞市蔼群实业有限公司 DONGGUAN AIQUN INDUSTRIAL CO.,LTD				
	INCHES	MM					
. X	. 015	. 30					
. XX	. 010	. 10					
. XXX	. 005	. 05	SCALE	NONE		REV	A0
DRAWN BY	WSY		UNIT	MM			
CHECK BY			SHEET	2/2	CUSTOMER:		
APPD BY			DATE	25/12/18	DWG NO:		
TITLE: USB-4*DB9公 镀金							
CUSTOMER P/N:			P/N: 1. ADB160040001				