


P1 PCB

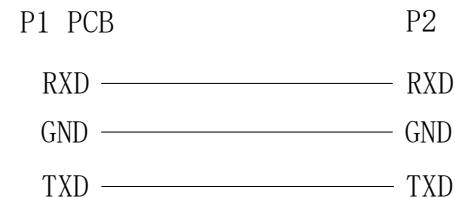

P2  
 RXD ————— RXD  
 GND ————— GND  
 TXD ————— TXD

电气特性:  
 1.100%开路、短路、断路测试。  
 2.绝缘阻抗: 10M Ohm Min  
 3.导通阻抗: 2 Ohm MAX  
 4.耐压: DC 300V,0.01/Sec

7	塑胶	45P PVC, MOLDED, ROHS	A/R	G
6	塑胶	LDPE, 本色, MOLDED, ROHS	A/R	G
5	连接器	USB A/M, PIN 镀镍1u, ROHS	1	PCS
4	PCB板	PCBA WITH FT232 CHIP, ROHS	1	PCS
3	连接器	DC2.5公头, 3极, 镀镍	1	PCS
2	连接器	DC3.5公头, 3极, 镀镍	1	PCS
1	线材	28AWG*3C, BARE COPPER, PVC JACKET, ROHS	A/R	M
NO	NAME	Description	QTY	Unit

A	INITIAL RELEASE		25/08/23	
REV	DESCRIPTION OF CHANGE		DATE	
TOLERANCE INCHES				
.X	.015	.30		
.XX	.010	.10		
.XXX	.005	.05		
DRAWN BY TONY CHAN			SCALE NONE	REV A
CHECK BY			UNIT MM	
CUSTOMER. P/N:			SHEET 1/1	COSTOMER:
			DATE 25/08/23	DWG NO.:
			TITLE: USB TO DC2.5+DC3.5	
			P/N: AKT180010002	